



ONDULINE EASYFIX®

PATIO



GARDEN SHED

Made by me!



MaxStar 8306105A - 02/2018 - Not contractually binding. All information given is for illustrative purposes only and may be modified without notice.




ONDULINE EASYFIX®

Made by me!



Before



After

INTUITIVE COVERING SHEET: EASY & FUN TO FIX.



ONDULINE EASYFIX®



GARDEN SHED



GARAGE



Easy to install



Onduline® Sealsmart™



Watertight



Lightweight



Intuitive installation



Eco-responsible

More than 50% of our material made with recycled content



Made in Europe



Norm EN 534



Recycled Content Verified by ICCI
See ICCI SAVE VAR - 1016



Protection above all

Fully compliant with regulations

Sustainable product & production because we care about environment!

ONDULINE SA
35 rue Baudin - CS20055
F-92593 Levallois-Perret
onduline.com



Onduline French limited liability company with board of directors, share capital of €11,323,485.05
RCS Nanterre 552 088 361

Onduline®
Lightweight roofing systems

Onduline®
Lightweight roofing systems

The **ONDULINE EASYFIX®** sheets are light, easy to install and can be used on the garden annexes, carport, small wooden buildings, gazebos etc.

Onduline® material does not contain any asbestos, and never had. Onduline® material does not contain any metal, it will never rust!

Made by me!

ONDULINE EASYFIX®


The new and innovative sheets ONDULINE EASYFIX® represent the ideal solution for all people who want a roofing material really easy to install and aesthetically pleasant.

A large choice of colors




Technical characteristics

Length	200 cm
Width	81 cm
Corrugation height	38 mm
Weight per m ²	2,77 kg
Weight per sheet	4,5 kg
Surface	1,62 m ²
Net coverage surface	1,34 m ²

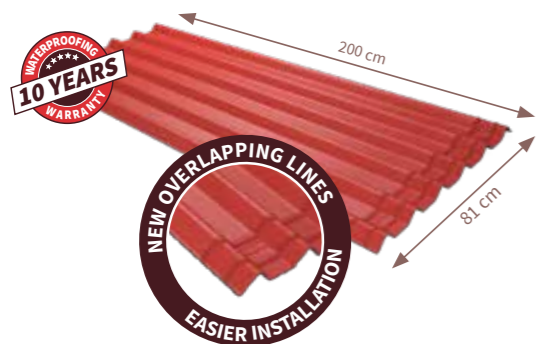


Onduline 10 years warranty for waterproofing, valid if the product has been installed with Onduline recommended accessories (Ridge, Verge, Fasteners) and in full compliance with installation recommendations (more on onduline.com).


Installation in few and easy steps

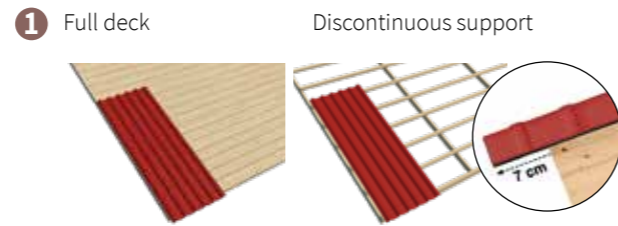

Start laying sheets over the gutter with 7 cm overhang maximum. Installation could be realized either on full deck (recommended) or on discontinuous support (**every 37 cm**).

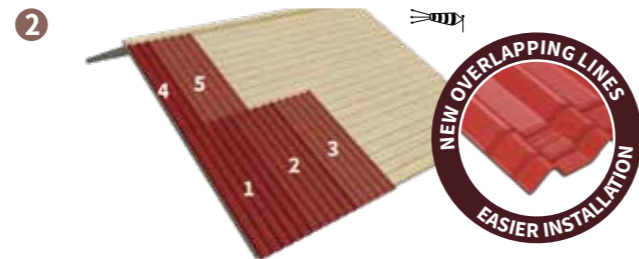


Lay sheets in the opposite direction to the prevailing winds. Stagger the rows, by starting the second row with a half sheet. Ensure easily the waterproofing by aligning the two overlapping lines.

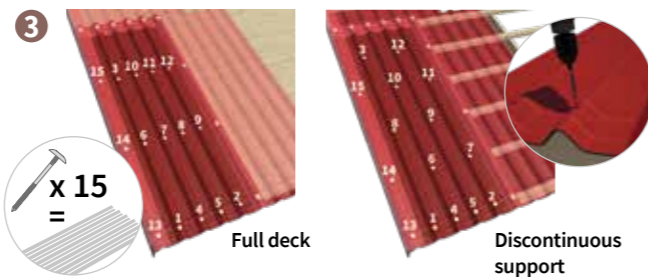


15 fixings minimum should be used per sheet. The fixing, always set in the top of corrugations, should be done in the right order and in between the two overlapping lines. Wait to fix the last corrugation until you overlap it with the verge element or the next sheet.


Maintain regularly your roof for a better durability: remove vegetation and leaf debris, take care of evacuations, accessories and structure, and maintain continuous ventilation.

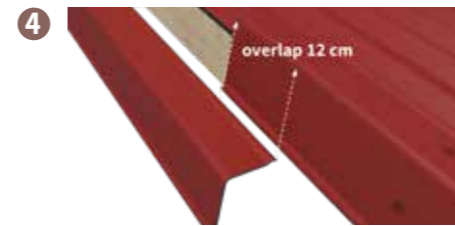

The aesthetics and wind uplift protection can be optimized by using the verge element accessory, which is fixed first on the sidewall, then as well on the top of the corrugation.

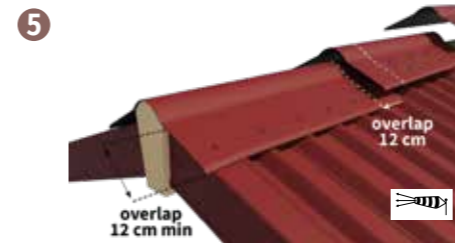


Cover the ridge with the standard ridge and fix it on each side of the roof, on top of each corrugation. The direction of the overlap is opposite to the direction of the prevailing winds.

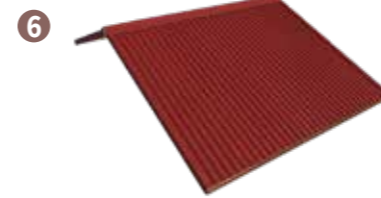

ONDULINE EASYFIX® sheets provide an attractive, colored and long lasting finishing to a wide variety of garden buildings.

CALCULATE THE PITCH OF YOUR ROOF

$$\text{Pitch (\%)} = \frac{h}{b} \times 100$$





Minimum pitch required: 9%



Watch the video!

Accessories

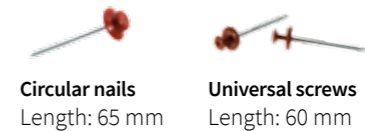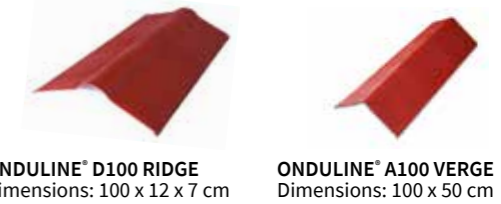

Circular nails
Length: 65 mm

Universal screws
Length: 60 mm

Minimum 10 fasteners/m²



Made by me!

How to cut and trim your product?

You can easily cut the sheets with roofers cutter, or with hand or mechanical saw.



Think Safety wear PPE